


Heating capacity




Tetris 2A/SLN
Tetris 2A+
Tetris 2SLN
Tetris 2A
Tetris 2

Tetris

third generation

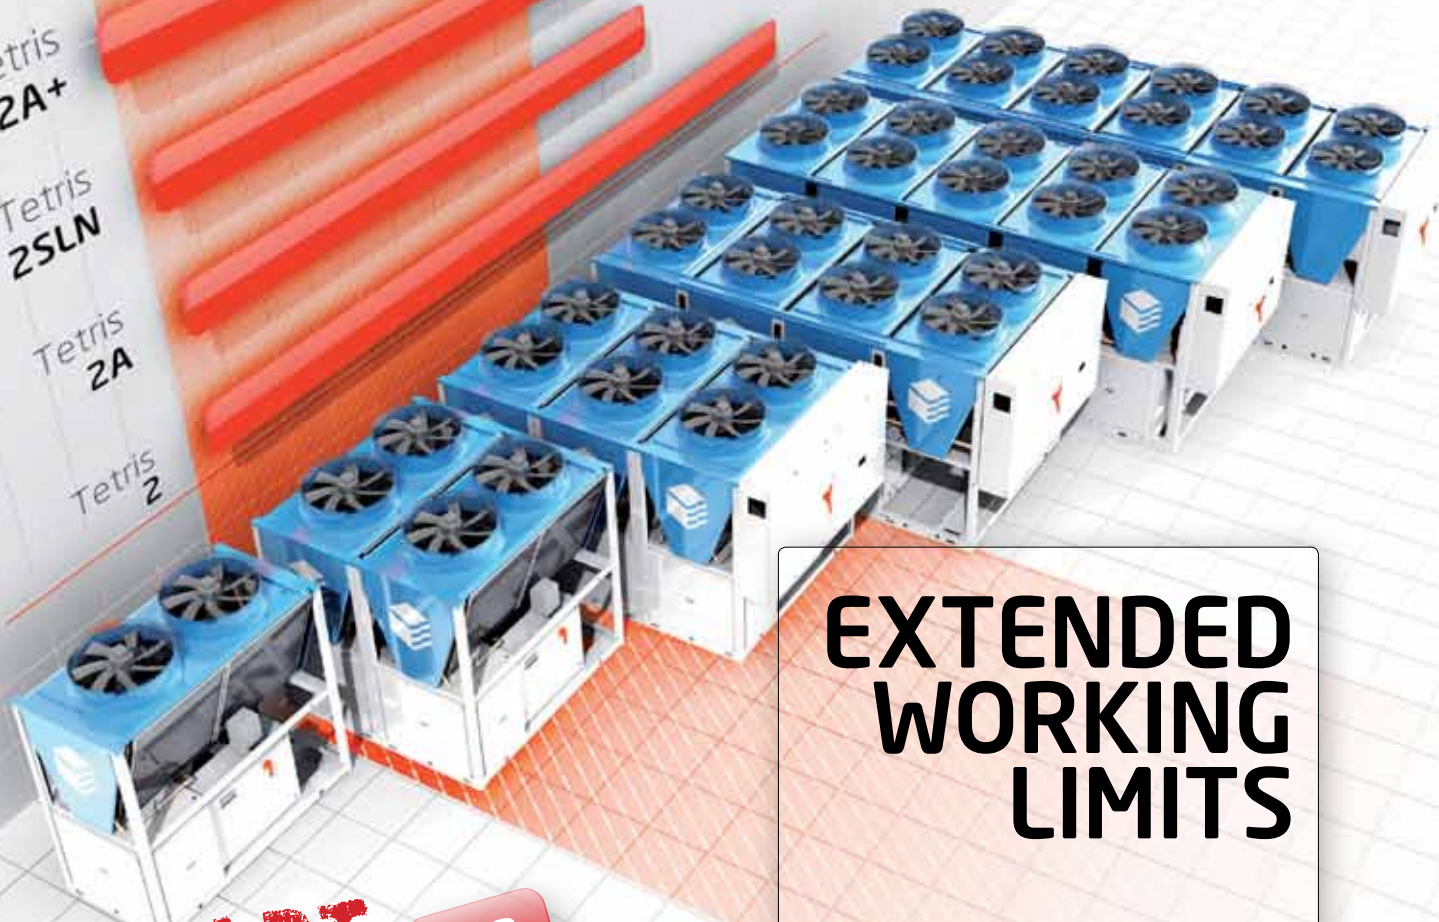

SMART CONTROL




EXTENDED WORKING LIMITS

HIGH COP



- ▶ User friendly interface
- ▶ Connectivity
- ▶ Datalogging
- ▶ Multilogic function

HIGH ENERGY EFFICIENCY

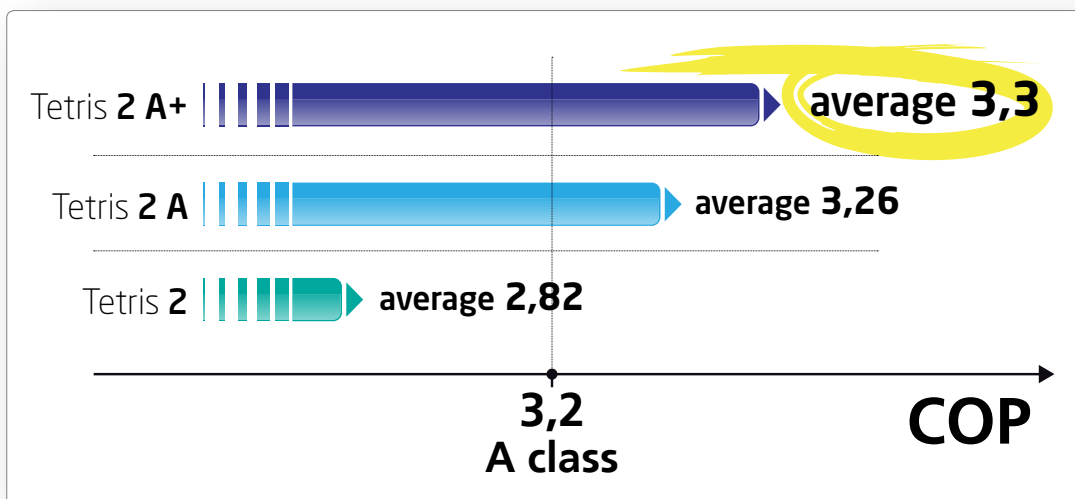

ADVANCED CONTROL FEATURES


- > User friendly interface based on visual icons
- > USB, RS485 and Ethernet ports as standard
- > Integrated web server with embedded management pages
- > Data recording of all parameters of unit one month long

MULTILOGIC FUNCTION

- > Up to 32 units (1 Master e 31 Slave) connected to the same hydronic circuit
- > Management of units with different logics and priority levels

WIDE WORKING LIMITS

Operating limits in heat pump mode.

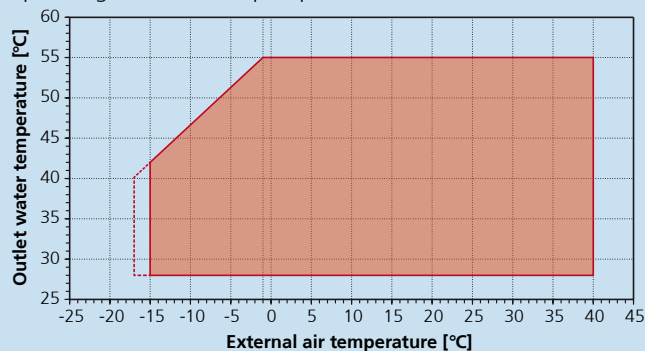

- Full Load > **up to -15°C**
- Part Load > **up to -17°C**
- Hot water > **55°C at -1°C**

Diagram based on high efficiency and SLN versions, some size can achieve operating limits slightly lower. For details, refer on specific documentation.



Blue Box Group S.r.l.
 A Swegon Group company
 Via Valletta, 5 - 30010 Cantarana di Cona, (VE) Italy
 www.bluebox.it - info@bluebox.it
 Phone +39 0426 921111 - Fax +39 0426 302222